




厦门市曙光电子科技有限公司

Xiamen Shulight Optoelectronic Technology Co., Ltd.

ADD: No. 180 Building Road Nanshan, Huli Industrial Zone, Xiamen 361006, China


TEL: +86-592-5659669 FAX: 86-592-5639450 E-mail: sales@slt-led.com [http:// www.slt-led.com](http://www.slt-led.com)

1. PRODUCT DESCRIPTION: Φ20mm M5 FIXED SCREW MAKEUP



➤ **Application Type :** 1W、3W、 5W White、 Yellow、 Red、 Green、 Blue、 Amber.

➤ **Physical Feature: :**

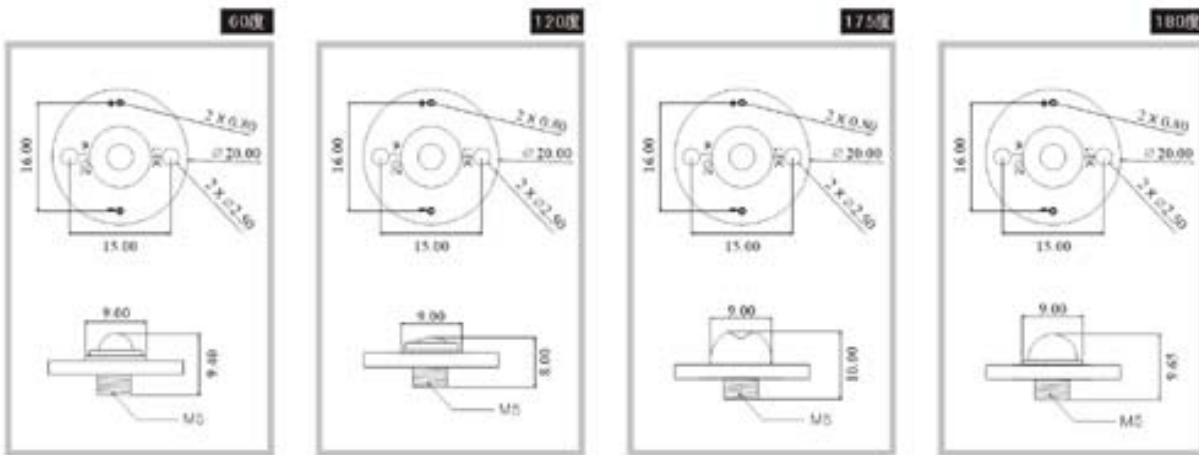

➤ **Optoelectronic Parameter :**

Power	Emitting color	Color Tep./wavelength	Luminous Flux	Test curren	Forward voltage
1W	White	3800-9000K	30-42lm	0.35A	3.5 V
	Warm white	3200K	20-25 lm	0.35 A	3.5 V
	Red	623nm	18-26 lm	0.35 A	2.5 V
	Orange	590 nm	20-25 lm	0.35 A	2.5 V
	Amber	605 nm	20-25 lm	0.35 A	2.5 V
	Pure green	525 nm	25-32 lm	0.35 A	3.5 V
	Blue	470 nm	3-5 lm	0.35 A	3.5 V



厦门市曙光电子科技有限公司


Xiamen Shulight Optoelectronic Technology Co., Ltd.

ADD: No. 180 Building Road Nanshan, Huli Industrial Zone, Xiamen 361006, China

TEL: +86-592-5659669 FAX: 86-592-5639450 E-mail: sales@slt-led.com [http:// www.slt-led.com](http://www.slt-led.com)

3W	White	3800-9000K	65-75 lm	0.7 A	3.5 V
	Warm white	3200K	50-60 lm	0.7 A	3.5 V
	Red	623 nm	45-55 lm	1.4 A	2.5 V
	Orange	590 nm	45-55 lm	1.4 A	2.5 V
	Amber	605 nm	45-55 lm	1.4 A	2.5 V
	Pure green	525 nm	50-60 lm	0.7 A	3.5 V
	Blue	470 nm	6-8 lm	0.7 A	3.5 V
5W	White	3800-9000K	95-120 lm	0.7 A	7.5 V
	Warm white	3200K	85-95 lm	0.7 A	7.5 V
	Red	623 nm	90-100 lm	2.1 A	3 V
	Orange	590 nm	70-80 lm	2.1 A	3 V
	Amber	605 nm	70-80 lm	2.1 A	3 V
	Pure green	525 nm	95-110 lm	0.7 A	7.5 V
	Blue	470 nm	12-15 lm	0.7 A	7.5 V

➤ Viewing Angle For Selection:

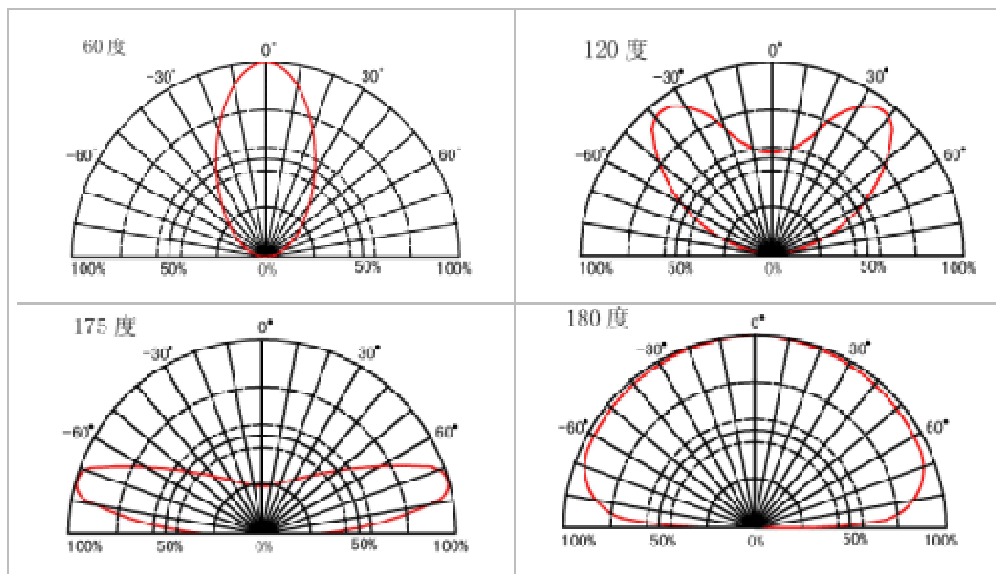

➤ Application :

Used for some professional area such as: medical, mine, traffic, safety, digital products and or so; used as city lighting project---emitting lamp, street scene lamp, garden lamp, courtyard lamp, bottom of water lamp, reading lamp for aegis eyes, flashing lamp, etc.