




SHULIGHT® LED Spot light

● SHULIGHT® High Power 3W/1w LED Spot Light

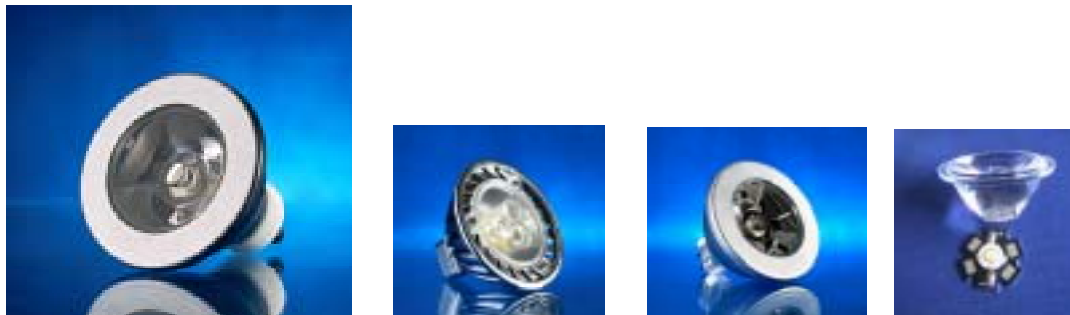

➤ Features:

- ✧ High-intensity Power 1W/3W LEDs in Red, Yellow, Blue, Green, White and RGB color with PMMA special optics lens.
- ✧ Optimized heat-scattering path and digital illumination patent technic.
- ✧ Aluminum body, for high shock/vibration resistant.
- ✧ Low power consumption.
- ✧ Solid-state, fast turn on.
- ✧ Operating life up to 100,000 hours.
- ✧ IP 64 degree, dustproof, no creepage.
- ✧ Easy installation, using existing socket.
- ✧ Save energy and maintenance cost, major reduction in heat generation.

➤ Applications:

For Home lighting, Table Lighting, Ad Lighting, Navigation Signal, Museum, Gallery, Shop-window, Casino, Bar, Hotel, Mall, Exhibition, and Meeting Room etc.

➤ Technical Specifications:

Part Number	LED Qty	Color	Watts	Input Voltage	Base Type	Waterproof
SL-GU10R-H3	1 pcs	Red	3W	AC120V/240V	GU10	IP64
SL-GU10Y-H3	1 pcs	Yellow	3W			
SL-GU10B-H3	1 pcs	Blue	3W			
SL-GU10G-H3	1 pcs	Green	3W			
SL-GU10W-H3	1 pcs	White	3W			
SL-MR16R-3H1	3 pcs	Red	3W	AC120V/240V	MR16	IP64
SL-MR16Y-3H1	3 pcs	Yellow	3W			
SL-MR16B-3H1	3 pcs	Blue	3W			
SL-MR16G-3H1	3 pcs	Green	3W			
SL-MR16W-3H1	3 pcs	White	3W			



厦门市曙光电子科技有限公司

Xiamen Shulight Optoelectronic Technology Co., Ltd.

ADD: No. 180 Building Road Nanshan, Huli Industrial Zone, Xiamen 361006, China

TEL: +86-592-5659669 FAX: 86-592-5639450 E-mail: sales@slt-led.com

● SHULIGHT® LED Spot Light Series

➤ Product photo

GU10



CMF12BBT

CMF21BBT..

SDY20BBT

BTW20B50T

SDW20BMT

SDR18BBT

MR16



CMF12BAP

CMF18BAP

CMF21BAP

SDA20BAP

SDA21BAP..

CMF12BAP

SDY18BAP

PAR



PTW50BKT

PDG70BKT

PDG70BKT-K


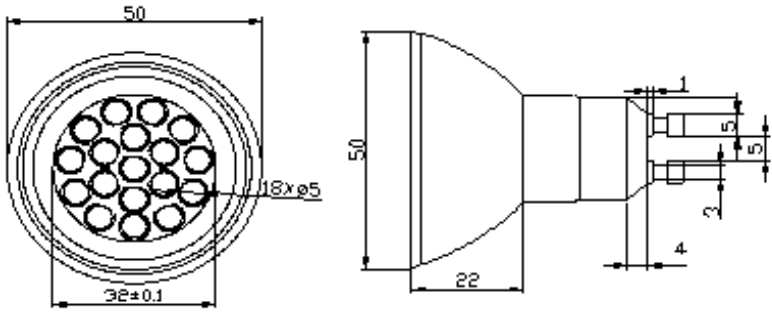
PDW20BHT

PDW50BJT

SDR18BFT

STW18BOT

➤ Technical Specifications

Part No.	Emitting Color	Operated Current(mA)	Operated Voltage(v)	Power (w)	LED Num.	Life	Luminous Flux(lm)	Operation Temp.
								
SL-GEW20P-01	White	80-250	12/24/220	4.4	20	60000h	27	-40--80
SL-GEB20P-01	Blue	80-250	12/24/220	4.4	20	60000h	18	-40--80
SL-GEG20P-01	Green	80-250	12/24/220	4.4	20	60000h	24	-40--80
SL-GER20P-01	Red	80-250	12/24/220	4.4	20	60000h	22	-40--80
SL-GEY20P-01	Yellow	80-250	12/24/220	4.4	20	60000h	28	-40--80
SL-GERGB20P-01	Seven Color	80-250	12/24/220	4.4	20	60000h	/	-40--80



厦门市曙光电子科技有限公司

Xiamen Shulight Optoelectronic Technology Co., Ltd.

ADD: No. 180 Building Road Nanshan, Huli Industrial Zone, Xiamen 361006, China

TEL: +86-592-5659669 FAX: 86-592-5639450 E-mail: sales@slt-led.com

Part No.	Emitting Color	Operated Current(mA)	Operated Voltage(v)	Power (w)	LED Num.	Life	Luminous Flux(lm)	Operation Temp.
SL-SDW20BAP-J	White	80-250	12	1.7 ± 0.4	20	60000h	30 ± 7	-40--80
SL-SDB18BAP-F	Blue	80-250	12	1.7 ± 0.4	18	60000h	7 ± 3	-40--80
SL-SDG20BAP-H	Green	80-250	12	1.7 ± 0.4	20	60000h	20 ± 5	-40--80
SL-SDR18BAP-F	Red	80-250	12	1.4 ± 0.3	18	60000h	19 ± 5	-40--80
SL-SDY20BAP-G	Yellow	80-250	12	1.4 ± 0.3	20	60000h	17 ± 5	-40--80
SL-SDRGB18BAP-F	RGB	80-250	12	1.7 ± 0.4	18	60000h	/	-40--80
SL=SDW6BIP-H	White	80-250	AC12V	0.5 ± 0.2	6	60000h	8.5 ± 2	-40--80
SL=SDW9BIP-H	White	80-250	AC12V	0.8 ± 0.3	9	60000h	13 ± 4	-40--80
SL=SDW9BIP-J	White	80-250	AC12V	0.8 ± 0.3	9	60000h	14.5 ± 4	-40--80
SL-P20W30B-V12	White	0.096	12	2.30	30	60000h	30	-40--80
SL-P20W32B-V220		0.04	220	1.92	32	60000h	30	-40--80
SL-P20R30B-V12	Red	0.096	12	2.30	30	60000h	9	-40--80
SL-P20R32B-V220		0.04	220	1.92	32	60000h	9	-40--80
SL-P20G30B-V12	Green	0.096	12	2.30	30	60000h	24	-40--80
SL-P20G32B-V220		0.04	220	1.92	32	60000h	24	-40--80
SL-P20B30B-V12	Blue	0.096	12	2.30	30	60000h	9	-40--80
SL-P20B32B-V220		0.04	220	1.92	32	60000h	9	-40--80
SL-P20Y30B-V12	Yellow	0.096	12	2.30	30	60000h	9	-40--80
SL-P20Y32B-V220		0.04	220	1.92	32	60000h	9	-40--80
SL-P20RGB21B-V12	RGB	0.144	12	1.73	21	60000h		-40--80
SL-P20RGB18B-V220		0.048	220	1.08	18	60000h		-40--80